




PXA 3000
Skin




PXA 1000
Anthracite




PXA 1000
Red




PXA 800
White




PXA 700
White




PXA 600
Yellow




PXA 500
Black




PXA 400
Parme




Thermocork 45
Cork




Thermocork 50
Cork



Thermocork 55
Cork




Thermocork 60
Cork **NEW**

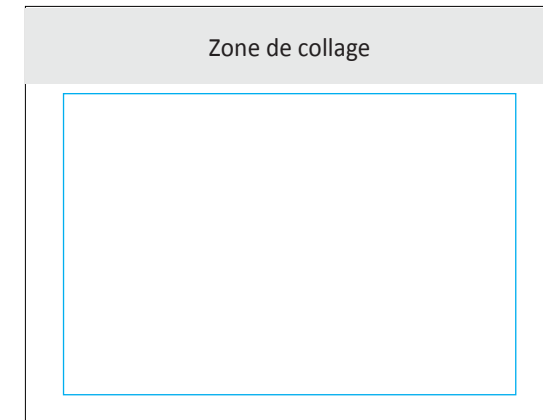

**PXA 600
Yellow**

TECHNICAL PROPERTIES PRIMALUX

Product	Material	Hardness	Density	Format	Thickness	Applications	Properties
PXA1000	PE	28	0,10g/cm ³	2300/ 1150	1 to 46mm	flexible, comfortable and resistant, light	padding
PXA800	PE	30	0,125g/cm ³	2200/ 1100	1 to 44mm	flexible insoles base, intermediate sheets for insoles	stability
PXA700	PE	40	0,14g/cm ³	2100/ 1050	1 to 42mm	cushioning, covering, paddings sheets, stable	stability
PXA600	PE	45	0,17g/cm ³	2000/ 1000	1 to 42mm	the base one of the world's most used	very stable
PXA500	PE	50	0,20g/cm ³	1850/ 925	1 to 40mm	great thermoforming stability, lift sheets insoles/shoes	very stable
PXA400	PE	55	0,25g/cm ³	1750/ 875	1 to 38mm	lift sheets for insoles and shoes, non deformable	very stable

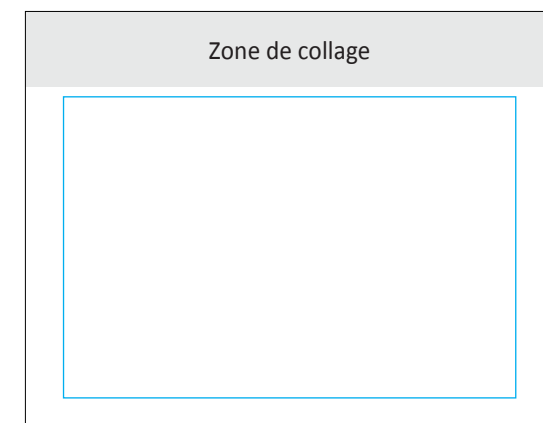


Thermocork 45

TECHNICAL PROPERTIES THERMOCORK

Product	Material	Hardness	Density	Format	Thickness	Applications	Properties
THERMOCORK 45	EVA/CORK	45	0,20g/cm ³	2050/ 1025	1 to 40mm	light material with real cork, good resilient, soft surface	stability
THERMOCORK 50	EVA/CORK	50	0,25g/cm ³	1975/ 950	1 to 38mm	intermediate, padding sheets for insoles resistant	stability
THERMOCORK 55	EVA/CORK	55	0,30g/cm ³	1750/ 875	1 to 36mm	hard and light, highly resilient	stability
THERMOCORK 60	EVA/CORK	60	0,35g/cm ³	1700/ 800	1 to 36mm	hard and light, resilient	stability

primalex



Thermoforming Lifting Sheets



Design r easy
thermoforming
Ultimate support
Strenght Durability

thermocork

Enriched EVA with Natural Cork

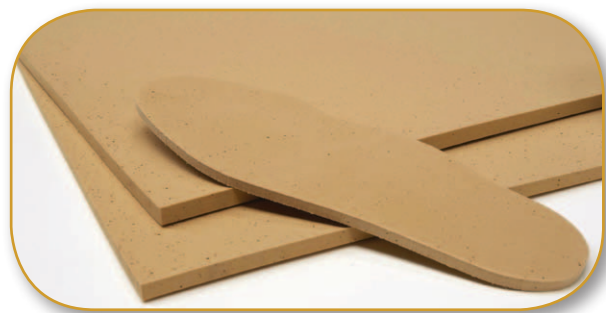

Long life
Easy lamination

CERTIFIED QUALITY

primalex is a range of enriched, very high quality PE (polyethylene) foams made in France, specially developed and tested for the orthopaedic, podiatric and shoe engineering market.

primalex is tested and certified by leading laboratories in particular for cutaneous contact and for chemical composition.

primalex is used for manufacturing the base and covering sheets of a wide range of orthopaedic insoles throughout the world: thanks to its versatility, PXA600 is one of the world's most used supports several dozen million insoles throughout the world.

primalex is available from 28 to 55 shA and from 0.10 to 0.25 g cm³.

CERTIFIED QUALITY

thermocork is a range of very high-quality, enriched EVA (ethyl-vinyl-acetate) foams, with real cork, made in France, specially developed and tested for the orthopedic, podiatric and shoe engineering market.

thermocork is tested and certified by leading laboratories in particular for cutaneous contact and for chemical composition.

thermocork is used for manufacturing the base of a wide range of orthopedic insoles.


thermocork is available from 45 to 60 shA and from 0.20 to 0.30 g/cm³.

evalastik System
Premium EVA

ultracel System
Topcover Polymers

primalexev System
Premium Cushioning Cover

evaflex System
EVA Milling Blocks & Strips

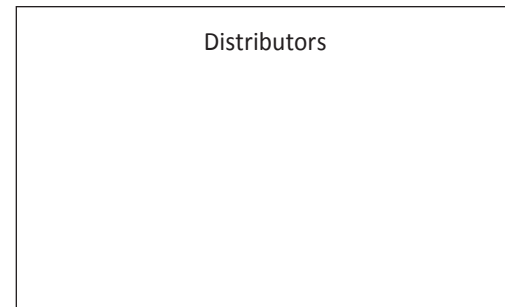


primalex System
Thermoforming Lifting Sheets


thermoflex System
EVA Milling Blocks & Strips

thermocork System
Enriched EVA with Natural Cork


primacad System
EVA Milling Blocks & Strips




Evaflex 14
Navy blue




Evaflex 22
Green




Evaflex 30
Taupe



Thermoflex 50
White




Thermoflex 55
Brown

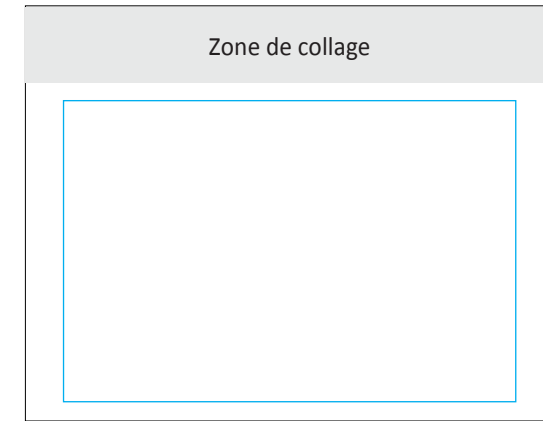

Evaflex 14
Navy blue

TECHNICAL PROPERTIES EVAFLEX

Product	Material	Hardness	Density	Format	Thickness	Applications	Properties
EVAFLEX 14	EVA HQ	14	0,11g/cm ³	2400/ 1200	1 to 46 mm	cushioning and covering sheets for insoles padding	very soft padding
EVAFLEX 22	EVA HQ	22	0,15g/cm ³	2300/ 1150	1 to 44 mm	padding and covering sheets resistant and comfortable	padding
EVAFLEX 30	EVA HQ	30	0,19g/cm ³	2100/ 1050	1 to 42 mm	cushioning covering padding sheets, shock absorbing	elastic and shock absorbing

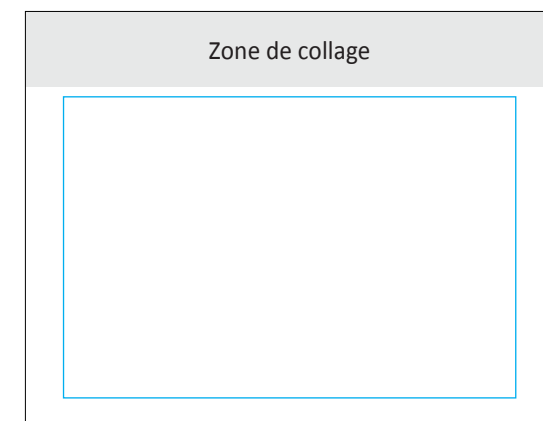


Thermoflex 55
Brown

TECHNICAL PROPERTIES THERMOFLEX

Product	Material	Hardness	Density	Format	Thickness	Applications	Properties
THERMOFLEX 50	EVA HQ	50	0,38g/cm ³	1800/ 900	1 to 40 mm	high elastic strong base	elastic and very stable
THERMOFLEX 55	EVA HQ	55	0,48g/cm ³	1750/ 875	1 to 38 mm	high elastic strong base	elastic and very stable

evaflex System



Comfortable premium EVA



The new very soft and highest rebond elasticity and confort EVA form

thermoflex System

Elastic thermoforming lifting sheet

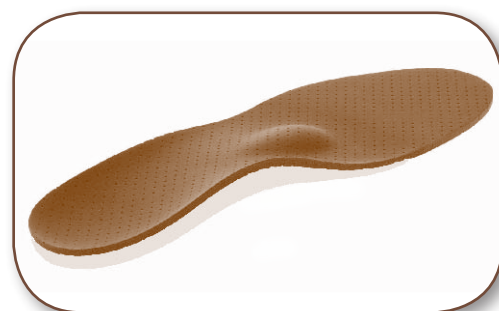

The new highly elastic thermo moldable very stable PE/EVA base

CERTIFIED QUALITY

evaflex is a comfortable, high quality, very soft and elastic EVA foam made in France, specially developed and tested for the orthopaedic, pediatric and shoe engineering market

evaflex is available from 14 to 30 Shore A and from 0,1 to 0,2 g/cm³.

CERTIFIED QUALITY

thermoflex is a highly elastic thermo-moldable PE/EVA used for manufacturing the base and covering sheets of a wide range of orthopaedic insoles throughout the world.

thermoflex is available from 50 to 55 Shore A and from 0,350 to 0,50 g/cm³.

evalastik System
Premium EVA

ultracel System
Topcover Polymers

primaluxev System
Premium Cushioning Cover

evaflex System
EVA Milling Blocks & Strips

Distributors

primalux System
Thermoforming Lifting Sheets

thermoflex System
EVA Milling Blocks & Strips

thermocork System
Enriched EVA with Natural Cork

primacad System
EVA Milling Blocks & Strips